


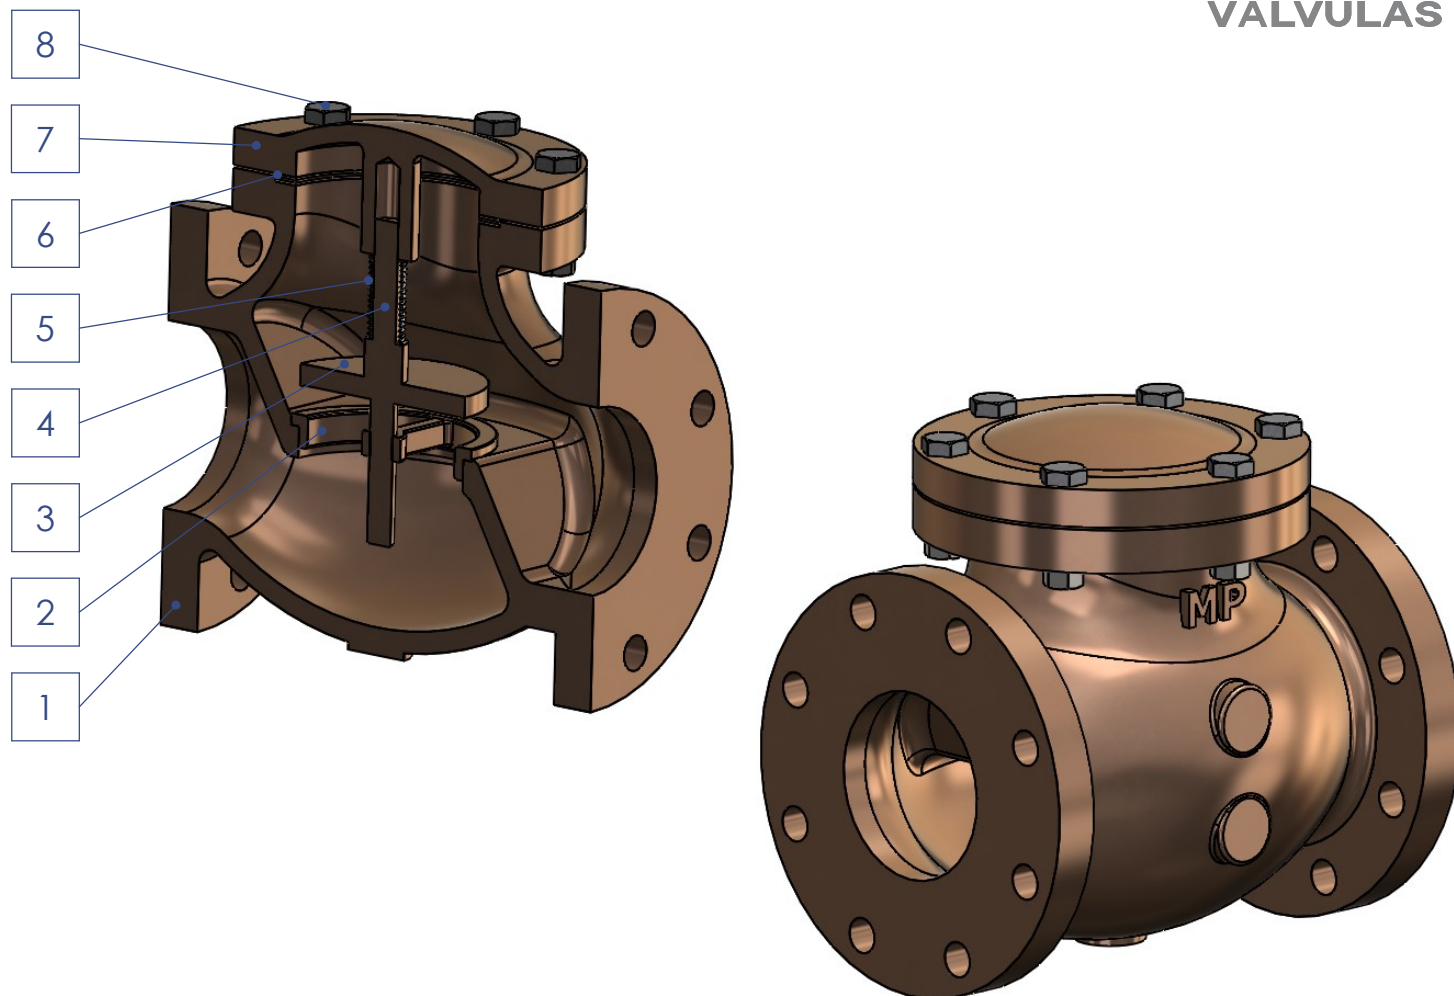



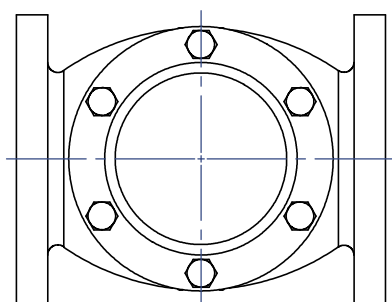

1	CORPO	BRONZE ASTM B62 C83600	NORMAS APLICADAS
2	ANEL DE VEDAÇÃO	BRONZE ASTM B62 C83600	BS 1868
3	CONTRA SEDE	BRONZE ASTM B62 C83600	MSS SP71
4	PINO DESLIZANTE DN. 1.½" α 4"	MACIÇO COM A CONTRA SEDE	API 598
	PINO DESLIZANTE DN. 5" α 12"	LATÃO B16	ASME B16.10
5	MOLA	AÇO INOX AISI 302	ASME B16.24
6	JUNTA	PAPELÃO HIDRÁULICO NA 1040	MSS SP 6
7	TAMPA	BRONZE ASTM B62 C83600	
8	PARAFUSOS E PORCAS	INOX 304	

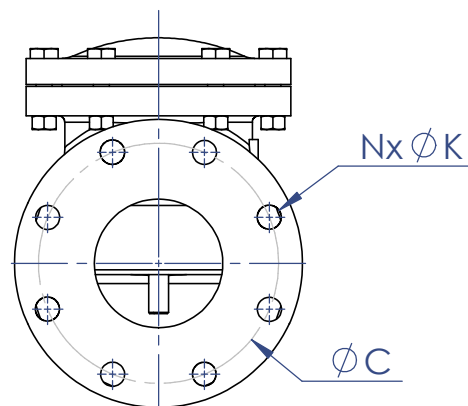

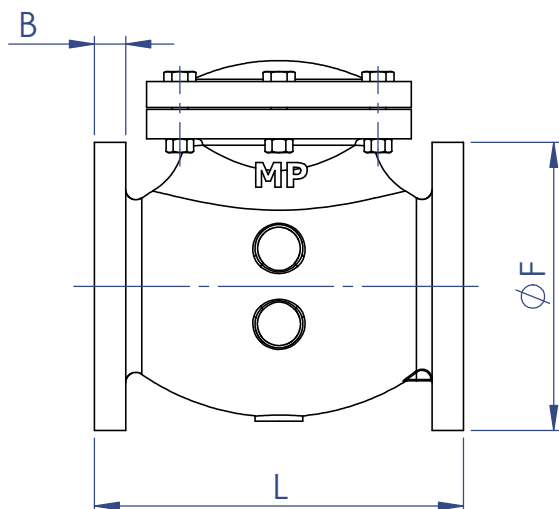

DN	L	F	B	C	N	K
1.½"	165	125	17,5	98,4	4	5/8"
2"	203	150	19,1	120,7	4	3/4"
2.½"	217	180	22,3	139,7	4	3/4"
3"	241	190	23,9	152,4	4	3/4"
4"	292	230	23,9	190,5	8	3/4"
5"	330	255	23,9	215,9	8	7/8"
6"	356	280	25,4	241,3	8	7/8"
8"	495	345	28,6	298,5	8	7/8"
10"	622	405	30,2	362	12	1"
12"	699	485	31,8	431,8	12	1"

